



6FM4 (12V4Ah)

KAIYING® Standard battery is design for a general purpose by KaiYing Power. 6FM4 is a g eneral purpose battery up to 5 years in star service As with all **KAIYING®** batteries, all are rechargeable highly efficient, leak proof and maintenance free.



pecifications:

Cells per Unit	6
Normal Voltage	12V
Capacity	4Ah@20hr-rate to 1.75V per cell@25°C
Weight	Approx. (1.35±3%)kg (2.98lbs)
Maximum Discharge Current	40A(5sec)
Internal Resistance	Approx. 50mΩ full charged @25°C
Operating Temperature Range	Discharge: -15°C~50°C Charge: -15°C~40°C Storage: -15°C~40°C
Nominal Operating Temperature Range	25°C±3°C(77°F±5°F)
Float Charging Voltage	13.6~13.8VDC/unit Average @25°C
Maximum Charging Current	1.2A
Equalization and Cycle Service	14.4V~15.0VDC/unit Average @ 25°C
Self Discharge	KAIYING Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	F1(0.187)/F2(0.250)
Container Material	ABS(UL94-HB) *Flammability resistance of (UL94-V0) can be available upon request



ISO 9001:2008 Standard






ISO 14001:2004 Standard




MH46789




Dimensions: L90*W70*H102(TH107)



Terminal F1



Terminal F2




Constant Current Discharge Characteristics (A, 25 °C)

F.V/TIME	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60	15.2	9.60	7.60	4.40	2.60	1.42	1.02	0.69	0.44	0.37	0.20
9.90	14.7	9.31	7.41	4.29	2.54	1.41	1.01	0.69	0.44	0.37	0.20
10.2	14.4	9.12	7.30	4.22	2.50	1.40	1.00	0.68	0.44	0.37	0.20
10.5	14.0	8.83	7.07	4.09	2.42	1.39	0.99	0.67	0.44	0.37	0.20
10.8	13.6	8.57	6.93	4.01	2.37	1.37	0.98	0.67	0.44	0.37	0.20


Constant Power Discharge Characteristics (Watt, 25 °C)

F.V/TIME	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60	170	108	86.6	50.4	30.1	16.6	12.1	8.24	5.31	4.48	2.44
9.90	165	105	84.5	49.2	29.4	16.5	12.0	8.20	5.31	4.49	2.44
10.2	161	103	83.2	48.4	28.9	16.4	11.9	8.12	5.26	4.44	2.41
10.5	156	100	80.6	46.9	28.0	16.2	11.8	8.04	5.28	4.43	2.41
10.8	151	96.7	79.0	46.0	27.5	16.1	11.6	7.96	5.23	4.42	2.40


Float Service Life

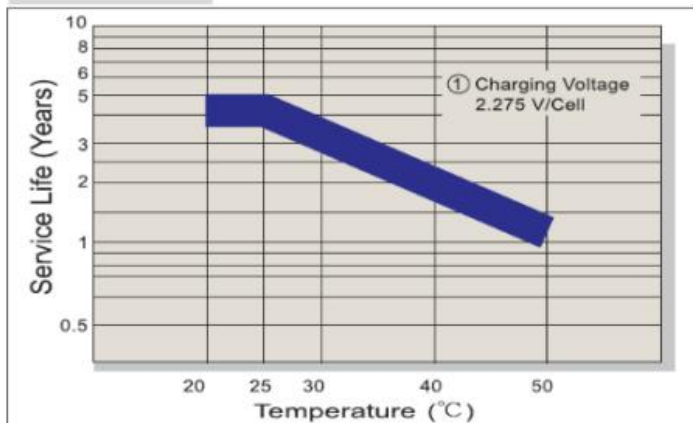


Capacity Retention Characteristic

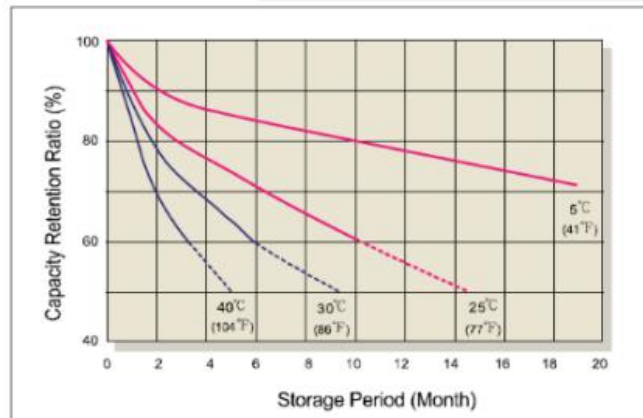


Battery Voltage and Charge Time for Standby use

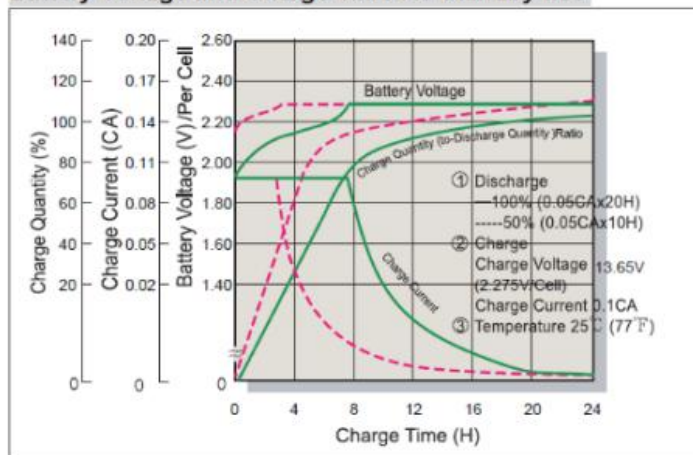


Cycle Service Life

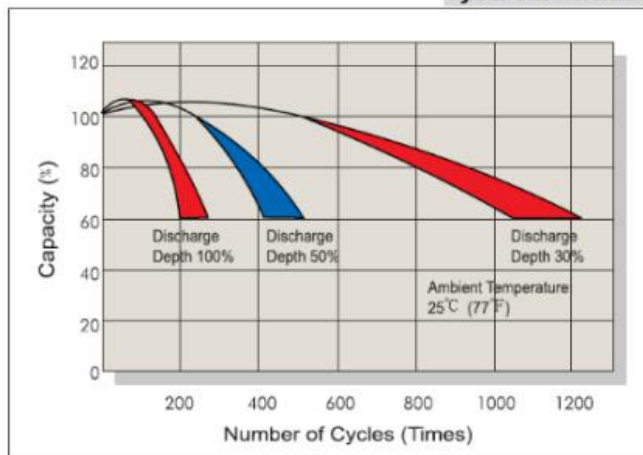

Battery Voltage and Charge Time for Cycle Use

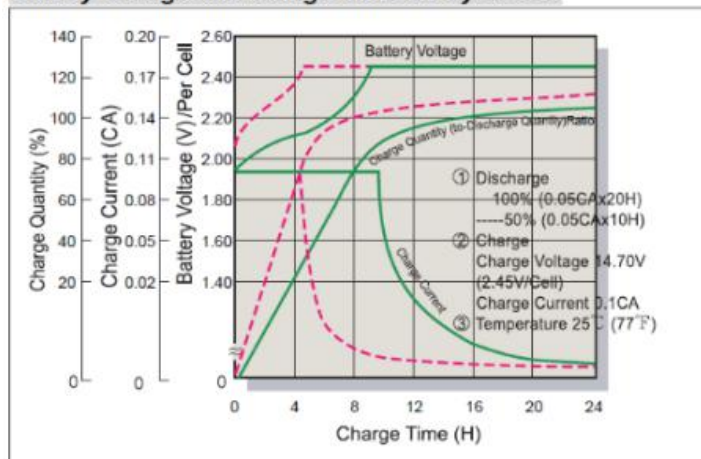

Terminal Voltage (V) and Discharge Time

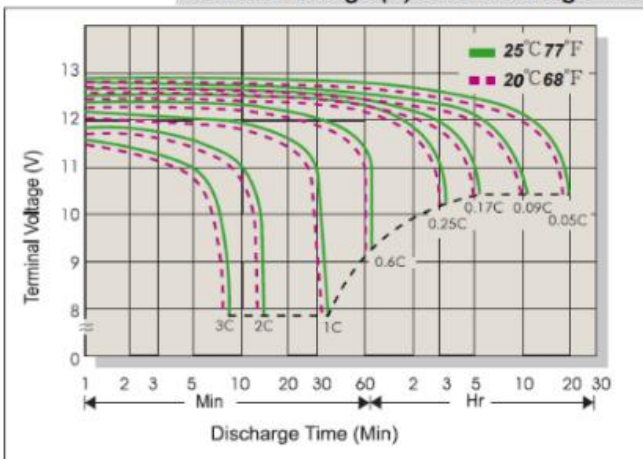

Charging Procedures

Application	Charge Voltage(V/cell)			Max. Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C(77°F)	2.45	2.40~2.50	0.3C
Standby	25°C(77°F)	2.275	2.25~2.30	

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75	1.70	1.65	1.60
Discharge Current (A)	0.2C>(A)	0.2C<(A) <0.5C	0.5C<(A) <1.0C	(A)>1.0C

KaiYing Power Supply & Electrical Equip Co., Ltd.

Address: KaiYing Industrial Park, ChengXiang Town, Anxi, Quanzhou, Fujian China

Tel:86-595-22999888/ 22199788 Fax:86-595-22199789

Website:www.kaiyingpower.com Email:sales@kaiyingbattery.com